


ASP-671

TABLE TOP LOAD CELL

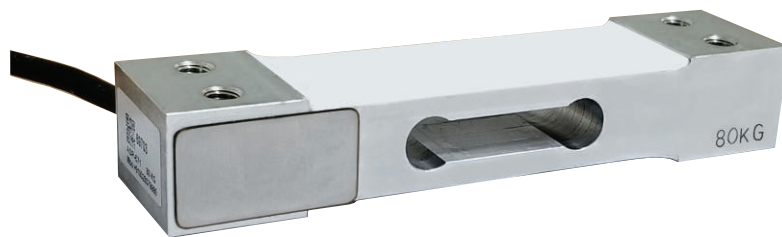

DESCRIPTION :

ASP-671 is an economical, low profile table top load cell.

APPLICATIONS :

- Table top scales.
- Counting and postal scales.
- Check weighers.


KEY FEATURES :

- Low Profile design
- Supports 300 x 300mm platform size

SPECIFICATIONS :

Rated capacity (Kgf.)	: 3, 6, 10, 15, 20, 30, 40, 60, 80
Excitation Voltage	: 10 VDC-Maximum 15 VDC
Rated Output	: 2.0 mV/V
Non – Linearity	: $< \pm 0.025 \% \text{ FSO}$ (Full scale Output)
Hysteresis	: $< \pm 0.02 \% \text{ FSO}$
Non-Repeatability	: $< \pm 0.01 \% \text{ FSO}$
Creep error (30 minutes)	: $< \pm 0.03 \% \text{ FSO}$
Zero Load Output	: $\pm 1.0 \% \text{ FSO}$
Input Resistance	: $400 \pm 20 \text{ Ohms}$
Output Resistance	: $350 \pm 10 \text{ Ohms}$
Insulation Resistance	: $> 1000 \text{ Mega Ohms}$
Safe Overload	: 150 % of Rated Capacity
Ultimate Overload	: 250 % of Rated Capacity
Temperature	: 0 to 60° C
Compensated Range	
Temperature Effect at Full Load	: $< 0.0015 \% \text{ FSO}/^{\circ} \text{C}$
Temperature Effect at Zero Load	: $< 0.002 \% \text{ FSO}/^{\circ} \text{C}$
Max. Platform Size	: 300 x 300 mm
Tightening torque	: 1.5 kg-m
Finish & Construction	: Aluminum Alloy
Environment Protection	: IP 65

Electrical Termination

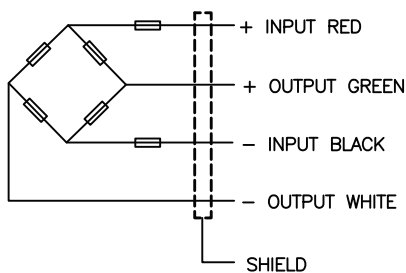

ADI CONTROLS

1B,1C POR INDUSTRIAL PARK
BEHIND SAHYOG HOTEL
POR 391243 DIST VADODARA (INDIA)

www.adicontrols.com

Email : sales@adicontrols.com

Customer Care : +91 9328579990

