


ASP-631

PLATFORM LOAD CELL

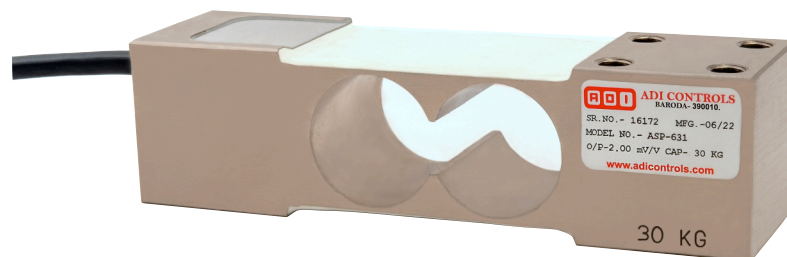

DESCRIPTION :

ASP-631 is a high accuracy, low profile platform load cell – ideal solution for smaller size platform scales.

APPLICATIONS :

- Platform Scales
- Bag Weighing
- Check Weighing


KEY FEATURES :

- Low Profile design
- Tool Steel construction
- Wide capacity range
- Supports 600x600 platform size

SPECIFICATIONS :

Rated capacity (Kgf.)	: 30, 60, 100, 200, 250, 300, 400
Excitation Voltage	: 10VDC-Maximum 15 VDC
Rated Output	: 2.0 mV/V
Non – Linearity	: $< \pm 0.025 \% \text{ FSO}$ (Full scale Output)
Hysteresis	: $< \pm 0.02 \% \text{ FSO}$
Non-Repeatability	: $< \pm 0.01 \% \text{ FSO}$
Creep error (30 minutes)	: $< \pm 0.03 \% \text{ FSO}$
Zero Load Output	: $\pm 1.0 \% \text{ FSO}$
Input Resistance	: $388 \pm 10 \text{ Ohms}$
Output Resistance	: $350 \pm 4 \text{ Ohms}$
Insulation Resistance	: $> 1000 \text{ Mega Ohms}$
Safe Overload	: 150 % of Rated Capacity
Ultimate Overload	: 250 % of Rated Capacity
Temperature	: 0 to 60° C
Compensated Range	
Temperature Effect on Output	: $< 0.0015 \% \text{ FSO}/^{\circ} \text{C}$
Temperature Effect on Zero	: $< 0.002 \% \text{ FSO}/^{\circ} \text{C}$
Max. Platform Size	: 600 x 600 mm
Off Center Load Error	: $< 0.02\% \text{ of FSO at } 1/3 \text{ rated load/300mm off center}$
Deflection	: $< 0.5 \text{ mm at FSO}$
Finish & Construction	: Electroless Nickel plated Tool Steel. Stainless Steel available optionally
Environment Protection	: IP 67

Electrical Termination

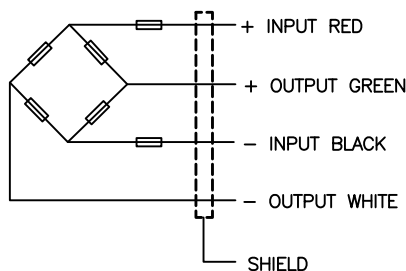


ADI CONTROLS

1B,1C POR INDUSTRIAL PARK
BEHIND SAHYOG HOTEL
POR 391243 DIST VADODARA (INDIA)

www.adicontrols.com

Email : sales@adicontrols.com

Customer Care : 9328579990

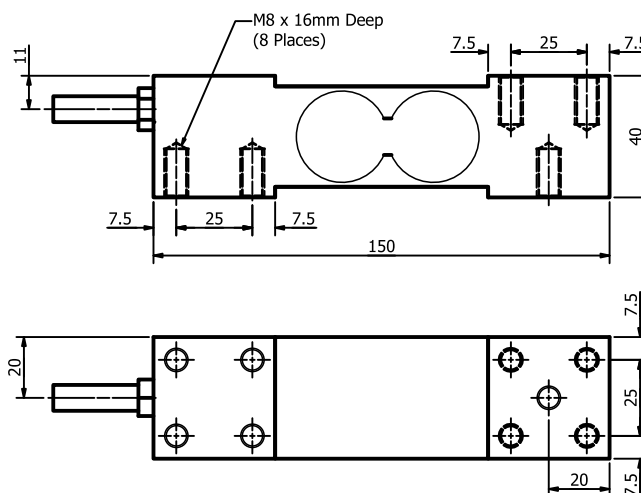

LOADING
DIRECTION

All dimensions are in mm.